SCOTSMAN

REMOTE COOLED MODULAR CONTOUR CUBERS

CME2006

VOLUME PRODUCTION • 24 HOUR

Certified & rated in accordance with ARI standard 810-95	Remote	
	70°/50° lbs./kg.	ARI 90°/70° lbs./kg.
CME2006-32C	1930/874	1740/789
CME2006-3C	1930/874	1740/789

Value the Difference of CM³ Ice Machines:

- Featuring Food Service Industry's first scroll compressor by Copeland.
- CM³ series offers the lowest lifetime operating costs based on lower water and electrical usage. Combine that with a competitive purchase price and the best warranty in the industry and you have the lowest lifetime ownership cost. Period.
- AutoIQ™ Control System monitors and controls the ice machines' functions to ensure consistent ice production and reduce operating costs.
- CM³ Evaporator is a hot tin dipped, molecularly bonded plate that has been field tested and proven 99.4% reliable over 5 years.
- Rust-free Polyethylene Base & Food Zone is insulated with 1-1/2" of foam which keeps water and food zone cool to reduce operating costs and is backed by a Lifetime Rust-Free Warranty.
- Contemporary styling and stainless steel finish make the CM³ a perfect addition to any operation.

WARRANTY *See your dealer for complete warranty details.*

- 3 years parts and labor on all components.
- 5 years parts and labor on the CME evaporator.
- 5 years parts on the compressor and condensor.

BIN OPTIONS:

BIN: BH900

BIN: BH1366



APPROX. CUBE SIZE:
1 3/8" x 1 3/8" x 5/8" THICK

SCOTSMAN MODULAR BINS — Certified & rated in accordance with ARI standard 820-95

Model Number	Dimensions W"x D"x H"	ARI Bin Capacity	Application Capacity	Finish	Ship Weight lbs./kg.
BH900S-C	48.2 x 33.75 x 44	740 LBS.	940 LBS.	SS	185/84
BH1366S	56 x 40 x 53	1030 LBS.	1320 LBS.	SS	380/172
BH1666S	60 x 40 x 60	1250 LBS.	1600 LBS.	SS	410/186

(SS) Stainless Steel with Polyethylene liner.

This product qualifies for the following listings:

Rated in accordance with ARI standard 810-95

Scotsman®

Ice Machine Specifications

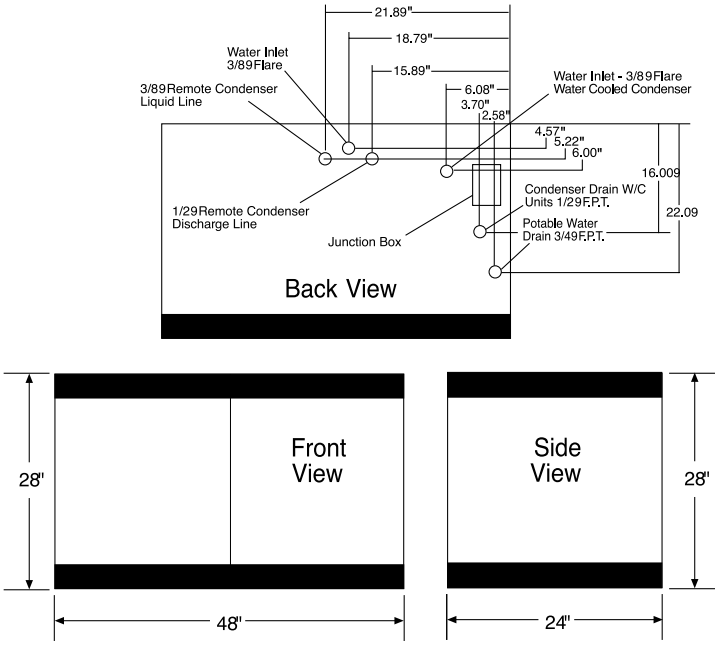

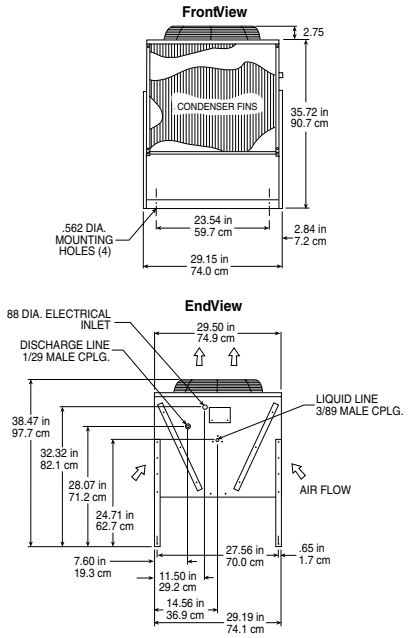

All models: Dimensions: W x D x H Unit: 48″ x 24″ x 28″ Shipping Carton: 51″ x 27″ x 31″

Model Number	Condenser Unit	Basic Electrical Volts/Hz/Phase	Max. Fuse Size or HACR Circuit Breaker	Comp. HP	Circuit Wires	Min. Circuit Ampacity	BTU's per hour	Shipping Weight lbs./kg.	Power Consumption KWH/100 lbs. 90°F/70° F	Water Usage Gallons/100 lbs. Potable 90°F/70° F	Water Usage Gallons/100 lbs. Condenser 90°F/70° F
CME2006RS-32D	REMOTE	208-230/60/1	40	4.0	2	30	40,000	370/168	5.8	17.5	–
CME2006RS-3D	REMOTE	208-230/60/3	30	4.0	3	20	40,000	370/168	5.8	17.5	–

All units with Stainless Steel finish.
Refrigerant: R-404A.

OPTIONS:
Stacking Kit: KSCME6-LG

REMOTE CONDENSER—Comes with adjustable legs
Dimensions: W x D x H: 29.50″ x 38.00″ x 38.50″

Model Number	For Use With	Cond. Unit	Finish Basic	Electrical Volts/Hz/Phase	No. of Wires	Min. Circuit Ampacity	Max Fuse Size or HACR Circuit Braker
ERC611-32A	(1) CME2006R	Air	Galvanized	208-230/60/1	2	1.25	15

PRE-CHARGED REFRIGERANT TUBE KITS: 25-Foot, LRTE25-25 • 40-Foot, LRTE40-40 • 75-Foot, LRTE75-75, Refrigerant: R-404A.

IMPORTANT OPERATING REQUIREMENTS:

	Minimum	Maximum
Air Temperatures	50°F (10°C)	100°F (37.7°C)
Water Temperatures	40°F (4.4°C)	100°F (37.7°C)
Remote Cond. Temps	-20°F (-28.9°C)	120°F (48.9°C)
Water Pressures	20 PSIG	120 PSIG
Electrical Voltage	-5%	+10%

Scotsman's ice machines are not designed for outdoor installations. Scotsman remote condensers are designed for outdoor installations.

Machine requires voltage indicated on rating name plate. Failures caused by improper voltage are not considered factory defects. Extended periods of operation at temperatures exceeding limitations constitutes misuse under the terms of Scotsman Manufacturer's Limited Warranty, resulting in a loss of warranty coverage. Specifications and design are subject to change without notice.

Consult Your Local SCOTSMAN Representative At:

775 Corporate Woods Parkway • Vernon Hills, IL 60061 • 1-800-SCOTSMAN • Fax: (847) 913-9844
Visit our website at: www.scotsman-ice.com • E-mail: customer.service@scotsman-ice.com

Scotsman®

SC-2006 10M 11-01